


## Tapered carrier rollers KFR for medium loads

- **Roller sleeve:** manufactured from thermoplastic plastic, alternatively available in steel.
- **Axle:** Steel, bright-drawn ST 37 K, axle ends with external thread or internal thread.
- **Bearing:** Manufactured from thermoplastic plastic with double labyrinth seal and precision deep grooved ball bearings.
- These tapered conveyor rollers consist of individual elements, which means that track widths from 90 - 990 mm can be realised.
- Also available with double sprocket + single sprocket in steel and plastic (fixed or accumulating drive), in the larger diameters respectively.

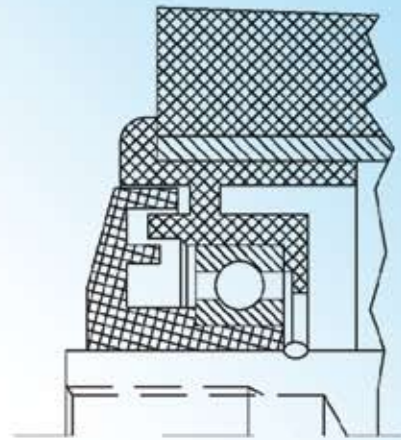

- **Order example:** KFR-290/A12/IG M8 EL = 310 mm or KFR-590/A12/M 12 EL = 624 mm

Order No.	Roller ø mm	Axle ø mm	AGM	EL=RL+	AL=RL+	IGM	EL=RL+
KFR-090/A12	54/59.9	12	M12	34	30	M8	20
KFR-190/A12	54/66.6	12	M12	34	30	M8	20
KFR-290/A12	54/73.4	12	M12	34	30	M8	20
KFR-390/A12	54/80.1	12	M12	34	30	M8	20
KFR-490/A12	54/86.9	12	M12	34	30	M8	20
KFR-590/A12	54/93.6	12	M12	34	30	M8	20
KFR-690/A12	54/100.4	12	M12	34	30	M8	20
KFR-790/A12	54/107.1	12	M12	34	30	M8	20
KFR-890/A12	54/113.9	12	M12	34	30	M8	20
KFR-990/A12	54/120.9	12	M12	34	30	M8	20



Other taperings are available in steel or alternatively in rigid polyurethane

