



Polyurethane heavy-duty castors

Swivel castor with double brake


180 - 1800 kg

Order No.
mm
mm
mm
mm
mm
mm
mm
kg

40/080/36/KDS	80	36	112	39	105 x 85	80 x 60	9	180
40/100/30/KDS	100	30	132	40	105 x 85	80 x 60	9	200
40/100/40/KDS	100	40	145	40	105 x 85	80 x 60	9	300
40/125/35/KDS	125	35	159	40	105 x 85	80 x 60	9	250
40/125/40/KDS	125	40	159	40	105 x 85	80 x 60	9	300
40/150/40/KDS	150	40	185	41	140 x 110	105 x 80	11	400
40/150/50/KDS	150	50	185	53	140 x 110	105 x 80	11	550
40/150/60/KDS	150	60	210	50	175 x 140	140 x 105	15	800
40/200/50/K/S/DS	200	50	245	64	140 x 110	105 x 80	11	1000
40/200/60/KDS	200	60	264	45	175 x 140	140 x 105	15	1200
40/250/50/KDS	250	50	310	63	200 x 160	160 x 120	15	1200
40/250/60/KDS	250	60	310	63	200 x 160	160 x 120	15	1500
40/300/70/KDS	300	70	355	70	200 x 160	160 x 120	15	1800

Wheel series 4:

- ▶ Special grey cast iron wheel centre **with ball bearing**
- ▶ Moulded polyurethane running surface, approx. 95° Shore hardness A
- ▶ Resilient and quiet running, low abrasive wear
- ▶ Non-marking, resistant to many abrasive agents

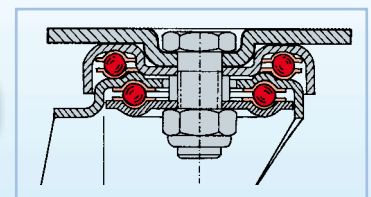

Fixed castors

180 - 4500 kg

Order No.
mm
mm
mm
mm
mm
mm
mm
kg

45/080/036/K	80	36	112	-	100 x 85	80 x 60	9	180
45/100/30/K	100	30	132	-	100 x 85	80 x 60	9	200
45/100/40/K	100	40	145	-	95 x 110	80 x 60	9	300
45/125/35/K	125	35	159	-	95 x 110	80 x 60	9	250
45/125/40/K	125	40	159	-	95 x 110	80 x 60	9	300
45/150/40/K	150	40	185	-	145 x 110	105 x 80	11	400
45/150/50/K	150	50	185	-	145 x 110	105 x 80	11	550
45/150/60/K	150	60	210	-	170 x 145	140 x 105	15	800
45/200/50/K/S	200	50	245	-	145 x 110	105 x 80	11	1000
45/200/60/K	200	60	264	-	175 x 140	140 x 105	15	1200
45/250/50/K	250	50	310	-	200 x 160	160 x 120	15	1200
45/250/60/K	250	60	310	-	200 x 160	160 x 120	15	1500
45/250/100/K	250	100	310	-	200 x 160	160 x 120	15	2200
45/300/70/K	300	70	355	-	200 x 160	160 x 120	15	1800
45/300/100/K	300	100	380	-	200 x 160	160 x 120	17	2800
45/350/100/K	350	100	430	-	250 x 200	210 x 160	19	3000
45/400/100/K	400	100	490	-	250 x 200	210 x 160	19	3500
45/500/100/K	500	100	600	-	250 x 200	210 x 160	19	4500

Housing series 40:

- ▶ Heavy pressed steel plate housing, galvanised, steel welded structure from Ø 250 mm
- ▶ Fork head with double ball bearing and **hardened bearing shells**
- ▶ Particularly resistant to shock and impact