



## Solid rubber castors

### Wheels

50 - 295 kg

Order No.	mm	mm	mm	mm	kg
522/080/BG	80	25	12	40	50
522/100/BG	100	30	12	40	70
522/125/BG	125	38	15	50	100
522/160/BG	160	40	20	60	135
522/200/BG	200	50	20	60	205
522/250/BG	250	60	25	75	295


### Wheel series 522/ BG:

- ▶ Steel plate wheel centre **with roller bearing**
- ▶ Solid rubber running surface, **non-marking, blue-grey** approx. 80° - 85° Shore hardness A

### Swivel castors

50 - 295 kg

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
LI/522/080/R/BG	80	25	100	36	105 x 80	80 x 60	9	50
LI/522/100/R/BG	100	30	125	38	105 x 80	80 x 60	9	70
LI/522/125/R/BG	125	38	155	38	105 x 80	80 x 60	9	100
LI/522/160/R/BG	160	40	190	52	135 x 110	105 x 80	11	135
LI/522/200/R/BG	200	50	235	54	135 x 110	105 x 80	11	205
LI/522/250/R/BG	250	60	290	66	135 x 110	105 x 80	11	295

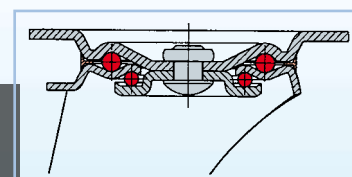

### Swivel castors with double brake

50 - 295 kg

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
LI/522/080/R/BG/DS-N	80	25	100	36	105 x 80	80 x 60	9	50
LI/522/100/R/BG/DS-N	100	30	125	38	105 x 80	80 x 60	9	70
LI/522/125/R/BG/DS-N	125	38	155	38	105 x 80	80 x 60	9	100
LI/522/160/R/BG/DS-N	160	40	190	52	135 x 110	105 x 80	11	135
LI/522/200/R/BG/DS-N	200	50	235	54	135 x 110	105 x 80	11	205
LI/522/250/R/BG/DS-V	250	60	290	66	135 x 110	105 x 80	11	295

### Housing series LI:

- ▶ Standard steel plate housing, galvanised
- ▶ Fork head with double ball bearing

### Fixed castors

50 - 295 kg

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
BI/522/080/R/BG	80	25	100	-	102 x 87	80 x 60	9	50
BI/522/100/R/BG	100	30	125	-	102 x 87	80 x 60	9	70
BI/522/125/R/BG	125	38	155	-	102 x 87	80 x 60	9	100
BI/522/160/R/BG	160	40	190	-	135 x 114	105 x 80	11	135
BI/522/200/R/BG	200	50	235	-	135 x 114	105 x 80	11	205
BI/522/250/R/BG	250	60	290	-	135 x 114	105 x 80	11	295