



## Solid rubber castors


50 - 295 kg

Wheels

### Wheels - Series 522/KU:

- ▶ Plastic wheel centre with roller bearing
- ▶ Solid rubber running surface, odourless, black, approx. 80° - 85° Shore hardness A

- ▶ Floor contact staining can occur with these tyres

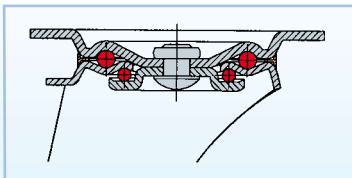

Order No.	mm	mm	mm	mm	kg
522/080KU	80	25	12	40	50
522/100KU	100	30	12	40	70
522/125KU	125	38	15	50	100
522/160KU	160	40	20	60	135
522/200KU	200	50	20	60	205
522/250KU	250	60	25	75	295

50 - 295 kg

Swivel castors

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
LI/522/080KU	80	25	100	36	105 x 80	80 x 60	9	50
LI/522/100KU	100	30	125	38	105 x 80	80 x 60	9	70
LI/522/125KU	125	38	155	38	105 x 80	80 x 60	9	100
LI/522/160KU	160	40	190	52	135 x 110	105 x 80	11	135
LI/522/200KU	200	50	235	54	135 x 110	105 x 80	11	205
LI/522/250KU	250	60	290	66	135 x 110	105 x 80	11	295

50 - 295 kg

Swivel castors with double

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
LI/522/080/KUDS-N	80	25	100	36	105 x 80	80 x 60	9	50
LI/522/100/KUDS-N	100	30	125	38	105 x 80	80 x 60	9	70
LI/522/125/KUDS-N	125	38	155	38	105 x 80	80 x 60	9	100
LI/522/160/KUDS-N	160	40	190	52	135 x 110	105 x 80	11	135
LI/522/200/KUDS-N	200	50	235	54	135 x 110	105 x 80	11	205
LI/522/250/KUDS-N	250	60	290	66	135 x 110	105 x 80	11	295

50 - 295 kg

Fixed castors

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
BI/522/080/KU	80	25	100	-	102 x 87	80 x 60	9	50
BI/522/100/KU	100	30	125	-	102 x 87	80 x 60	9	70
BI/522/125/KU	125	38	155	-	102 x 87	80 x 60	9	100
BI/522/160/KU	160	40	190	-	135 x 114	105 x 80	11	135
BI/522/200/KU	200	50	235	-	135 x 114	105 x 80	11	205
BI/522/250/KU	250	60	290	-	135 x 114	105 x 80	11	295

### Housing series LI:

- ▶ Standard steel plate housing, galvanised
- ▶ Fork head with double ball bearing