









Polyamide castors

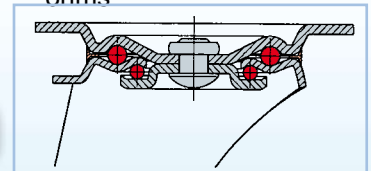
Wheels

150 - 450 kg

 Order No.	 mm	 mm	 mm	 mm	 kg
POEL/080/30/1R	80	30	12	40	150
POEL/100/35/1R	100	35	12	40	150
POEL/125/40/2R	125	40	15	50	250
POEL/150/40/4R	150	40	20	50	350
POEL/200/50/2R	200	50	20	60	450










Wheel series POEL:

- ▶ Polyamide 6 wheel centre **with roller bearing**
- ▶ Resistant to fracturing even with heavy loads, low rolling resistance
- ▶ Temperature resistance: - 40°C to + 90°C, high chemical resistance
- ▶ Electricity conductive
- ▶ The level of shunt resistance is <math> < 10^4 </math> (10,000) ohms












Swivel castors

150 - 350 kg

 Order No.	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg
LCW/POEL/080/R	80	30	103	36	105 x 80	80 x 60	9	150
LCW/POEL/100/R	100	35	125	36	105 x 80	80 x 60	9	150
LCW/POEL/125/R	125	40	155	36	105 x 80	80 x 60	9	200
LCW/POEL/150/R	150	40	188	52	135 x 110	105 x 80	11	350
LCW/POEL/200/R	200	50	235	54	135 x 110	105 x 80	11	350

Swivel castors with double brake

150 - 350 kg

 Order No.	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg
LCW/POEL/080/RDS-N	80	30	103	36	105 x 80	80 x 60	9	150
LCW/POEL/100/RDS-N	100	35	125	36	105 x 80	80 x 60	9	150
LCW/POEL/125/RDS-N	125	40	155	36	105 x 80	80 x 60	9	200
LCW/POEL/150/RDS-N	150	40	188	52	135 x 110	105 x 80	11	350
LCW/POEL/200/RDS-N	200	50	235	54	135 x 110	105 x 80	11	350

Housing series LCW:










- ▶ Standard steel plate housing, zinc plated
- ▶ Fork head with **double ball bearing**
- ▶ Sealing with integrated ball spacers



All swivel castors and swivel castors with double brake can also be supplied with 12 mm bolt hole attachment for the same price!

Fixed castors

150 - 350 kg

 Order No.	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 kg
BCW/POEL/080/R	80	30	103	36	102 x 85	80 x 60	9	150
BCW/POEL/100/R	100	35	125	36	102 x 85	80 x 60	9	150
BCW/POEL/125/R	125	40	155	36	102 x 85	80 x 60	9	200
BCW/POEL/150/R	150	40	188	52	135 x 114	105 x 75	11	350
BCW/POEL/200/R	200	50	235	54	135 x 114	105 x 75	11	350