




Polyurethane heavy-duty castors

Wheel series PA and 4:

- ▶ Die-cast aluminium wheel centre (PA series) **with ball bearing**
- ▶ Special grey cast iron wheel centre (series 4) **with ball bearing**
- ▶ Moulded polyurethane running surface, 92° +/-3° Shore hardness A
- ▶ Resilient and quiet running, low abrasive wear
- ▶ With cylindrical running surface, **anti-static**
- ▶ Electrical resistance is 5 x 10⁷ ohms

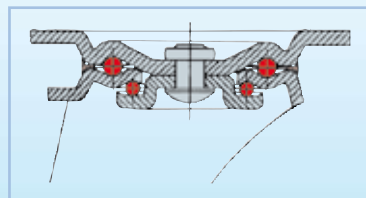

Housing series LU:

- ▶ Heavy pressed steel plate housing, zinc plated
- ▶ Fork head with double ball bearing
- ▶ Particularly resistant to shock and impact

180 - 1400 kg

Wheels

Order No.	mm	mm	mm	mm	kg
PA/082/301K/A/anti	80	30	12	40	180
PA/100/40/1K/A/anti	100	40	12	40	280
PA/125/40/4K/A/anti	125	40	20	50	350
PA/160/50/4K/A/anti	160	50	20	60	500
PA/200/50/5K/A/anti	200	50	25	60	700
4/200/50/5K/anti	200	50	25	60	1000
4/250/60/5K/anti	250	60	25	65	1400

180 - 800 kg

Swivel castors

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
LU/PA/082K/A/anti	80	30	108	40	105 x 80	80 x 60	8.5	180
LU/PA/100K/A/anti	100	40	128	40	105 x 80	80 x 60	8.5	280
LU/PA/125K/A/anti	125	40	155	40	105 x 80	80 x 60	8.5	350
LU/PA/160K/A/anti	160	50	200	56	135 x 110	105 x 80	10.5	500
LU/PA/200K/A/anti	200	50	245	56	135 x 110	105 x 80	10.5	600
LU/4/250/60K/A/anti	250	60	297	67	135 x 110	105 x 80	10.5	800

180 - 800 kg

Swivel castors with double

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
LU/PA/082K/ADS/anti	80	30	108	40	105 x 80	80 x 60	8.5	180
LU/PA/100K/ADS/anti	100	40	128	40	105 x 80	80 x 60	8.5	280
LU/PA/125K/ADS/anti	125	40	155	40	105 x 80	80 x 60	8.5	350
LU/PA/160K/ADS/anti	160	50	200	56	135 x 110	105 x 80	10.5	500
LU/PA/200K/ADS/anti	200	50	245	56	135 x 110	105 x 80	10.5	600
LU/4/250/60K/ADS/anti	250	60	297	67	135 x 110	105 x 80	10.5	800

180 - 800 kg

Fixed castors

Order No.	mm	mm	mm	mm	mm	mm	mm	kg
BU/PA/082K/A/anti	80	30	108	-	102 x 90	80 x 60	8.5	180
BU/PA/100K/A/anti	100	40	128	-	102 x 90	80 x 60	8.5	280
BU/PA/125K/A/anti	125	40	155	-	102 x 90	80 x 60	8.5	350
BU/PA/160K/A/anti	160	50	200	-	135 x 114	105 x 80	10.5	500
BU/PA/200K/A/anti	200	50	245	-	135 x 114	105 x 80	10.5	600
BU/4/250/60K/A/anti	250	60	297	-	135 x 110	105 x 80	10.5	800